


Details

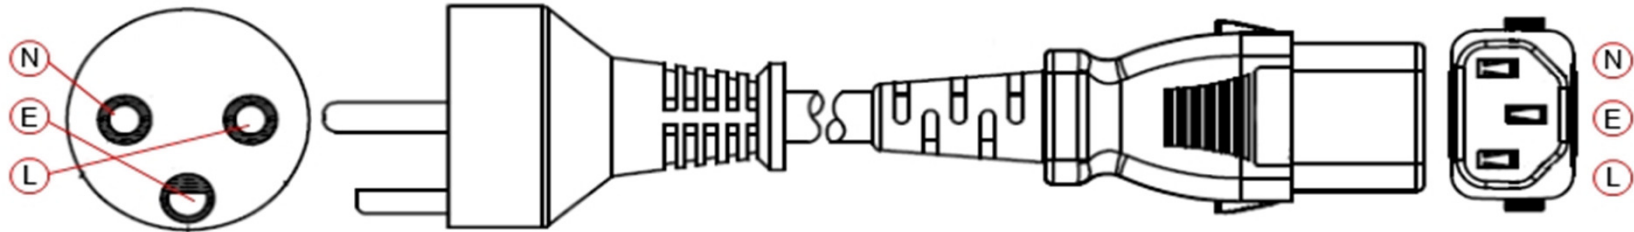

Side A

- 1 *Plug*
 - Type: DK 2-5a (AFSNIT 107-2-D1)
 - Contacts: N (Neutral)
E (Earth)
L (Life)
 - Gender: Male
- 2 *Housing*
 - Material: PVC, Molded
 - Orientation: Straight (180°)
 - Color: Black
- 3 *Ratings*
 - Current: 10A (max.)
 - Voltage: 250V (max.)

Wire

- 1 *Conductors*
 - Type: H05VV-F 3x 0.75mm²
 - Wires: Blue(N = Neutral)
Yellow/Green (E = Earth)
Brown (L = Life)
- 2 *Jacket*
 - Material: PVC
 - Color: Black

Side B

- 1 *Connector*
 - Type: IEC C13, Lockable
 - Contacts: L (Life)
E (Earth)
N (Neutral)
 - Gender: Female
- 2 *Housing*
 - Material: Plastic
Ultrasonic welded
 - Orientation: Straight (180°)
 - Color: Black
- 3 *Ratings*
 - Current: 10A (max.)
 - Voltage: 250V (max.)

Wiring diagram

Side A	Side B	Color
N	N	Blue
E	E	Yellow/Green
L	L	Brown

Approvals



Part number Description

S12A-045-03007 Power Cord, Denmark - C13 Lockable, 3x 0.75mm², Black, 2.5m

Image

